


SCOUT 202.927.25.2/DALI-EU

Scout Next (1xLED 21W 927/2700K 2260lm 25°)

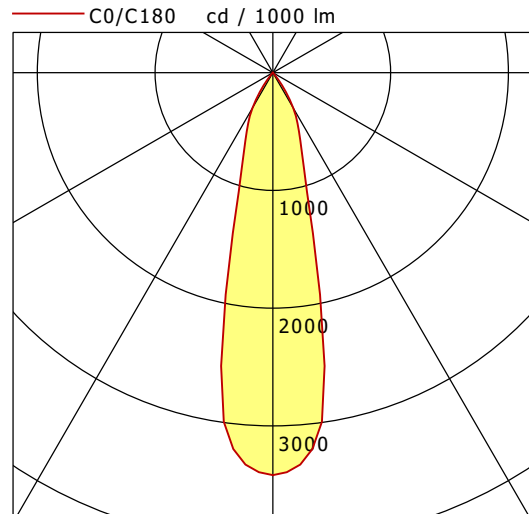

	C0	C90	C180	C270
0°	3418	3418	3418	3418
15°	1206	1206	1206	1206
30°	345	345	345	345
45°	4	4	4	4
60°	2	2	2	2
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.37	858.4
6.0	2.74	214.6
9.0	4.11	95.4
12.0	5.48	53.6
15.0	6.84	34.3

η	LED
Efficiency	108 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.4
UGR C90/C270	16.4
CIE Flux Codes	99 100 100 100 100
Ra/CRI	>90